

R (max) ft	H1 ft	R (min) ft	H2 ft	Rfs ft
213.3	71.9	13.1	240.8	66.9
196.9	68.2	13.1	224.1	63.0
180.4	64.6	13.1	207.3	61.0
164.0	61.0	13.1	190.6	59.1
147.6	57.1	13.1	173.6	55.8
131.2	53.5	13.1	156.8	52.5
114.8	49.5	13.1	140.1	55.8
98.4	45.6	13.1	123.4	55.8


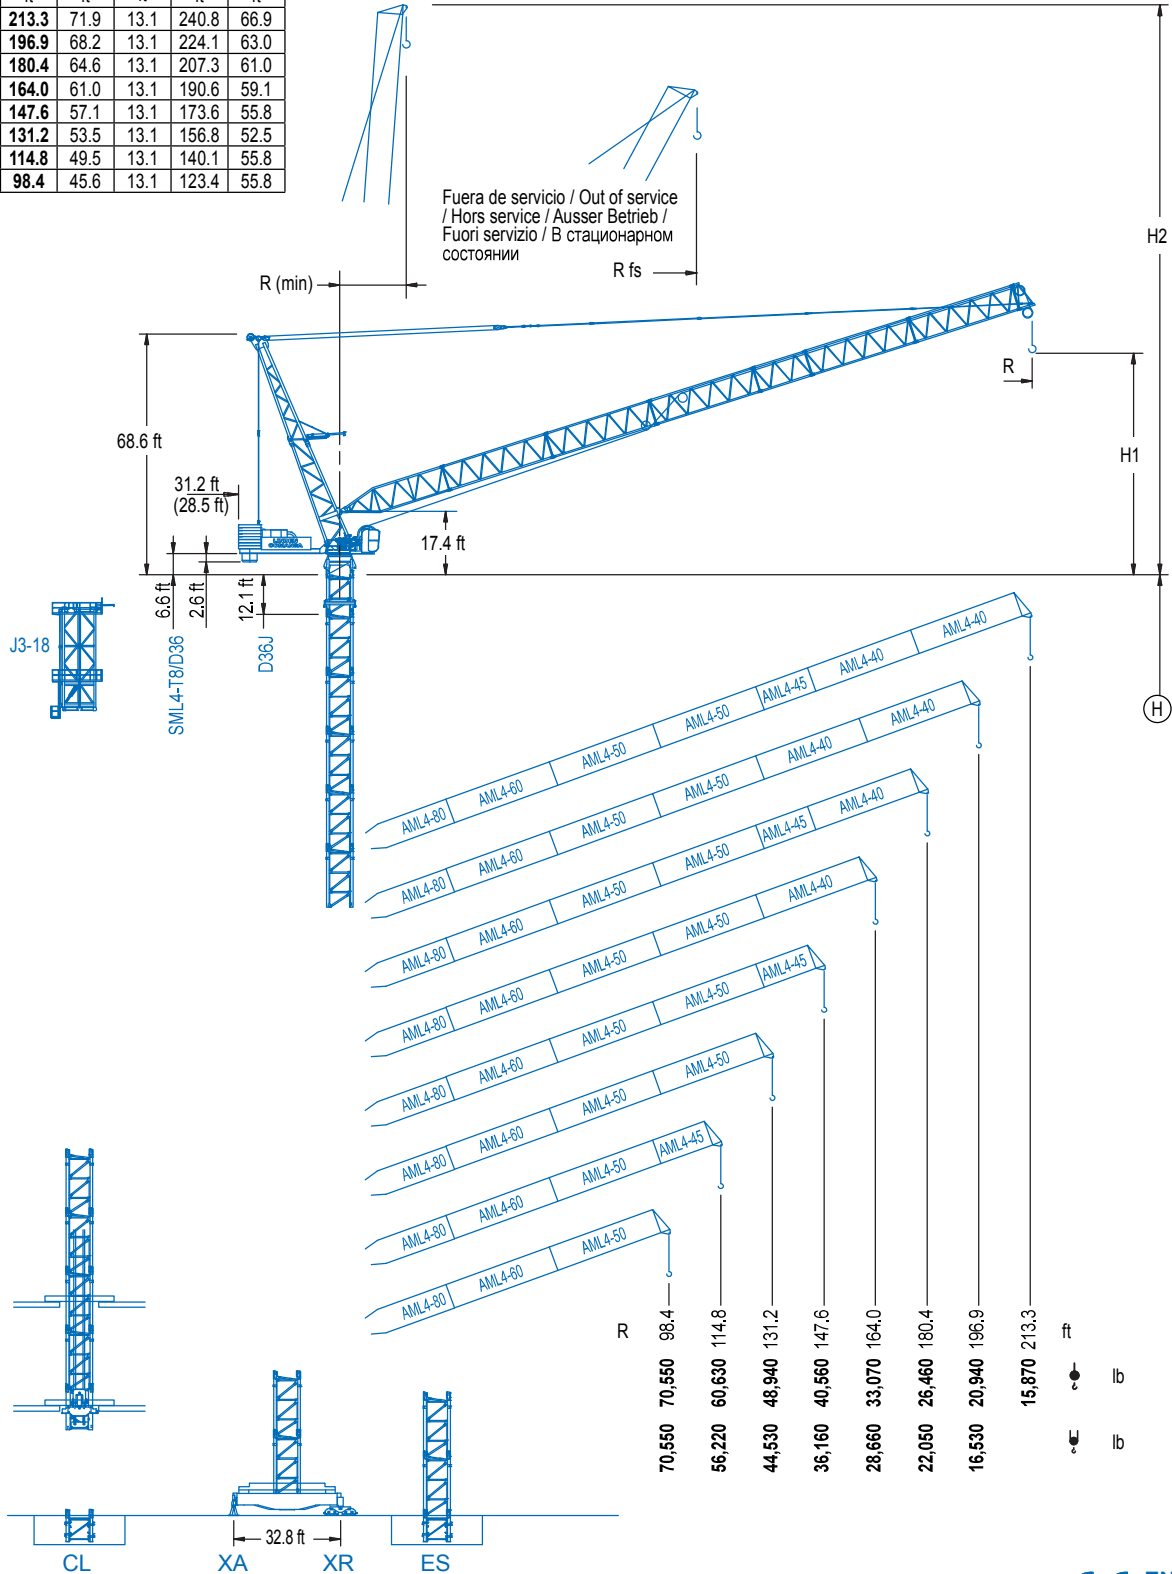



DIAGRAMA DE CARGAS

Load chart / Diagramme de charges / Lastdiagramm / Diagramma di carico / Диаграмма распределения нагрузки

R (ft)	RCmax (ft)	Cmax (lb)	49.2	65.6	82.0	98.4	114.8	131.2	147.6	164.0	180.4	196.9	213.3	↔ (ft) ↓ (lb)
213.3	90.4	70,550			70,550	59,880	45,350	36,130	29,740	25,020	21,360	18,410	15,870	
196.9	91.9	70,550			70,550	62,850	48,990	39,770	33,200	28,220	24,270	20,940		
180.4	93.6	70,550			70,550	65,370	51,920	42,700	35,980	30,750	26,460			
164.0	95.2	70,550			70,550	67,330	54,480	45,390	38,560	33,070				
147.6	96.2	70,550			70,550	68,500	56,310	47,470	40,560					
131.2	97.4	70,550			70,550	69,670	57,800	48,940						
114.8	100.1	70,550				70,550	60,630							
98.4	98.4	70,550				70,550								








R (ft)	RCmax (ft)	Cmax (lb)	49.2	65.6	82.0	98.4	114.8	131.2	147.6	164.0	180.4	196.9	213.3	↔ (ft) ↓ (lb)
213.3														
196.9	71.1	92,590		92,590	72,220	53,480	41,730	33,690	27,780	23,260	19,640	16,530		
180.4	58.8	119,050	119,050	100,400	71,940	55,230	44,220	36,400	30,510	25,900	22,050			
164.0	54.3	132,280	132,280	101,410	74,930	58,690	47,690	39,700	33,600	28,660				
147.6	51.2	141,090	141,090	102,760	77,600	61,660	50,640	42,530	36,160					
131.2	51.5	141,090	141,090	105,010	80,140	64,150	52,950	44,530						
114.8	52.2	141,090	141,090	108,530	83,860	67,730	56,220							
98.4	52.9	141,090	141,090	111,330	86,820	70,550								



MECANISMOS

Mechanisms / Mécanismes / Antriebe / Meccanismi / Механизмы

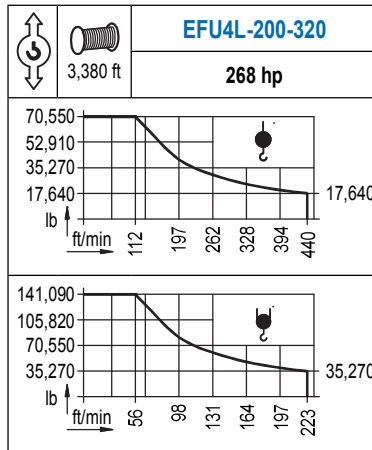

POTENCIA / POWER / PUISSANCE / LEISTUNG / POTENZA / МОЩНОСТЬ				Tensión de alimentación / Operating voltage / Tension de service / Betriebsspannung / Tensione di alimentazione / Напряжение источника питания	Generador / Generator / Générateur / Generator / Generatore / Генератор
Elevación / Hoist / Levage / Hub / Sollevamento / Тин механизма (подъем)	Abatimiento / Luffing / Relevage / Einziehen / Brandeggio / Складывание	Giro / Slewing / Rotation / Drehbewegung / Rotazione / Поворот	Traslación / Travel / Translation / Verfahrbewegung / Traslazione / Ход	480 V 3ph 60 Hz	650 kVA
EFU4L-200-320	AFU2-110-85	(4x) GFU-7.5	(4x) TRA-7.5		

Optional /
Optional / En
option / Kaufoption
/ Opzionale /
Опционально

*